

CYLARA ARCHITECTURAL CYLINDER DOWN LIGHT



DESCRIPTION

The CYLARA LED cylinder downlight has wide array of versatile options that allow for easy matching to your interior project's aesthetic. With standard white and black finishes you can select from 4 different internal baffle colors, 7 Decorative Reflector colors letting these fixture stand out as an accent to the interior design or meld into the background based on the end user's preference. With both surface and suspension options, 3 Diameters, 3 selectable wattages, 8 CCT options, 4 optical distributions, 4 internal baffle colors, 7 decorative reflectors, and plenty of mounting options the possibilities are only limited by your imagination.

FEATURES

- Highly configurable with over 100,000 possible option combinations.
- CCT and CRI options to meet high end project ewquirements.
- Mouting options for surface mounting on both hard top and recessed jboxes.
- Suspension options including both cable and rigid stems in multiple lengths to match your projects requirements.
- 4 available optical distributions to out the light where you need it, and to allow greater flexibility for achritectural lighting designers.

CONSTRUCTION & ELECTRICAL

- Modular Design with COB LED Chip
- Die cast Aluminum Housing for exceptional thermal managment
- UV Stabilized White Powder Coat Finish
- RoHS Compliant with minimal Mercury.
- 0-10V, Dim to Off or 120V Triac Dimming

BAFFLE

COLOR

DEC. REFL.

COLOR

MOUNTING

SUSP.

OPTIONS

- Damp Location Rated
- Power Factor ≥ 0.9
- THD < 20%

FINISH

Client: Client



PERFORMANCE DATA

EFFICACY

90-105 Lumens per Watt (LPW)

CCT/CRI

30K, 40K or 50K, 70+ CRI

RATED LIFE

>91,000+ Hours (L80) >153,000+ Hours (L70)

LUMEN OUTPUT

Lumen Output Ranges from 1,140 to 5,220 Lumens

OPERATING TEMPS

-40°C to 40°C Ambient

WARRANTY

WARRANTY

5 year Standard 10 Year Extended 10 Year Extended with Labor

ORDERING INFORMATION

CYLA		PTICAL ISTRIB.	VOLTAGE
FIXTU	RE SERIES	OPTIC	AL DIST
CYLARA	LED Cylinder Down Light	NOD	Narrow '
SIZE		MOD	Medium
4	4 inch Nominal Diameter Cylinder	WOD	Wide 36
6	6 inch Nominal Diameter Cylinder	FOD	Flood 60
8	8 inch Nominal Diameter Cylinder	VOLTA	GE
WATTA	\GE	UNV	Universa
25WS	12W, 18W, 25W Select. (4 Inch)	DRIVE	R FEATU
40WS	20W, 30W, 40W Select. (6 Inch)	99D	0-10V Di
58WS	30W, 45W, 58W Select. (8 Inch)	10V	0-10V Di
CRI/CC	т	TRIAC	120V TR
827	80+ CRI, 2700K CCT	FINISH	ĺ
830	80+ CRI, 3000K CCT	WH	White Fi
835	80+ CRI, 3500K CCT	BL	Black Fi
840	80+ CRI, 4000K CCT	BAFFL	E COLO
927	90+ CRI, 2700K CCT	WHB	White Ba
930	90+ CRI, 3000K CCT	BLB	Black Ba
935	90+ CRI, 3500K CCT	СОРВ	Copper
940	90+ CRI, 4000K CCT	CHRB	Chrome

STRIB.	rearbites coepia				
OPTIC/	OPTICAL DISTRIBUTION				
NOD	Narrow 15° Optical Distribution				
MOD	Medium 24° Optical Distribution				
WOD	Wide 36° Optical Distribution				
FOD	Flood 60° Optical Distribution				
VOLTA	GE				
UNV	Universal 120-277VAC				
DRIVE	R FEATURES				
99D	0-10V Dimming - 100-1% (25WS, 40WS Only)				
10V	0-10V Dimming				
TRIAC	120V TRIAC Line Dimming (25WS, 40WS Only)				
FINISH					
WH	White Finish				
BL	Black Finish				
BAFFLI	COLOR				
WHB	White Baffle				
BLB	Black Baffle				
COPB	Copper Baffle				
CHRB	Chrome Baffle				

DRIVER

FEATURES

DECORATIVE REFLECTOR COLOR		
BRF	Blue Decorative Reflector	
YRF	Yellow Decorative Reflector (MOQ & Ext. Lead)	
GRF	Green Decorative Reflector (MOQ & Ext. Lead)	
TRF	Transparent Decorative Reflector (MOQ & Ext. Lead)	
RRF	Red Decorative Reflector (MOQ & Ext. Lead)	
SRFB	12 Inch Black Spun Reflector (4 Inch Only)	
SRFW	12 Inch White Spun Reflector (4 Inch Only)	
MOUNTING		
RJBP	Flat Canopy for Recessed Jbox (Suspended Options)	
SJBP	Surface Mount Canopy J Box with Conduit Cutout	
RJBS	Surface Mount for Recessed JBox	
SUSPENSION OPTIONS		
CS2FT	2 FT Nominal Length Cable Suspension	
CS4FT	4 FT Nominal Length Cable Suspension	
CS8FT	8 FT Nominal Length Cable Suspension	
RS2FT	2 FT Nominal Length Rigid Stem Suspension	
RS4FT	4 FT Nominal Length Rigid Stem Suspension	
RS8FT	8 FT Nominal Length Rigid Stem Suspension	





CYLARA ARCHITECTURAL CYLINDER DOWN LIGHT

MOUNTING OPTIONS



REVO Lighting practices a program of continuous product development, and as a result product specifications chang We reserve the right to change product specifications without notice. Contact PEVO for the latest product inform 7




CYLARA ARCHITECTURAL CYLINDER DOWN LIGHT

OVER 100,000 OPTIONS, CONFIGURABLE IN SECONDS

Whether you need pendants in a specific finish or surface mount in a certain trims, we have you covered. With our user-friendly ordering guide, you can try out every combination according to your space required.

DIMENSIONS

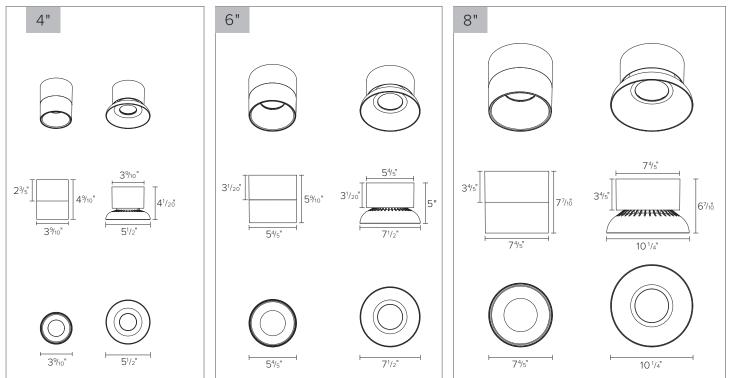

SURFACE



or program of continuous product development, and as a result product specifications change frequently. ange product specifications without notice. Contact REVO for the latest product information.





