

Client:	
Order #:	
Project:	



DESCRIPTION

The RVSL (REVO's Vapor Shield Luminaire) is a high-powered, non-corrosive linear ceiling mount fixture ideal for parking garages, wash down areas, industrial & manufacturing, covered canopies, pedestrian tunnels, and airports. Offered in 2ft and 4ft length configurations with tuneable wattage and CCT ranging from 2,500 lumens to 8,900 lumens. Emergency battery back up and sensor options are available.

FEATURES

- UL and CUL listed for wet locations
- High-powered linear ceiling mount fixture
- Selectable wattage and color temperatures: 3000K, 4000K, and 5000K
- Available in 2ft and 4ft length configurations

CONSTRUCTION & ELECTRICAL

- High impact Polycarbonate frosted lens
- Die-Cast conduit plugs
- Universal 120-277 input voltage
- 0-10V dimming allowing for 10% to 100% dimming
- Suitable for use in -40°C to +55°C Ambient

PERFORMANCE DATA

CRI

80+

CCT

3000K, 4000K, 5000K

Projected Lifetime

100,000+ Hours (L70)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to 50°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION

RVSL / _____ / _____ / _____ / _____ / _____ / _____ / _____ / _____ / _____
SERIES SIZE WATTAGE CCT VOLTAGE DRIVER FEATURES FINISH CONTROLS EMERG BATT. WARRANTY

FIXTURE SERIES	
RVSL	LED Vapor Tight
SIZE	
2	2 FT Nominal Length
4	4 FT Nominal Length
WATTAGE	
23W	23 Watt (3,420lm) (2 FT)
34WS	17W, 26W, 34W Select. (2,550 - 5,100 lm) (4 FT)
58WS	30W, 45W, 58W Select. (4,500 - 8,900 lm) (4 FT)
CRI/CCT	
CS	70+CRI, 30K, 40K, 50K CCT Select.
VOLTAGE	
UNV	Universal 120-277VAC




DRIVER FEATURES	
10V	0-10V Dimming
FINISH	
WH	White Powder Coat Finish (Standard)
CONTROLS	
MWI	Motion Sensor, Microwave Occ., Line Voltage, Internal Mount
EMERGENCY BATT. BACKUP	
EM8	8W 90 Min. Emergency Battery Backup (4ft. only)
WARRANTY	
-	5 Year Warranty (Standard)

OTHER VIEWS




DIMENSIONS

RVSL 2 FOOT

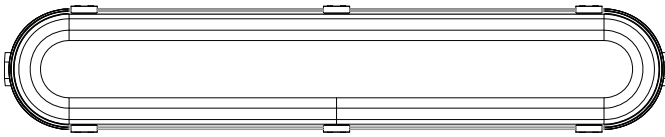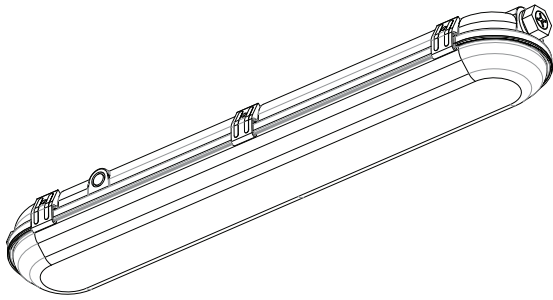

26"
(660.5mm)






4.95"
(125.8mm)



3.07"
(78mm)

RVSL 4 FOOT

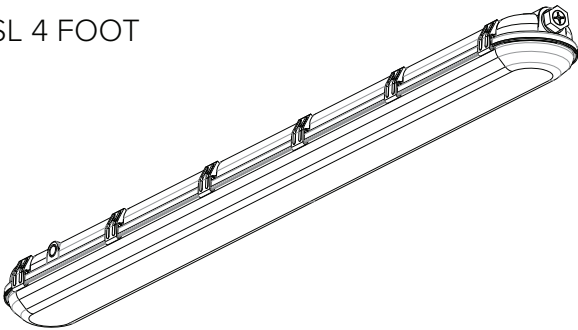

47.39"
(1203.7mm)



4.95"
(125.8mm)



3.07"
(78mm)