



Client:	
Order #:	
Project:	
Type:	

DESCRIPTION

The brand-new TITUS LED Wall Pack, available in wattages from 11W to 100W. Uniform light distribution and excellent LED lumen maintenance rate, high energy efficiency, low cost, while taking into account the stylish design, ensuring that the fixture has a long service life. Emergency egress battery and light control are optional, which is an ideal choice to meet.

FEATURES

- Selectable Wattage and CCT settings allowing to set the lumen value and CCT of the fixture to a level that is perfectly suitable for the jobsite.
- Two-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber.
- Casting thermally conducts LED heat to optimize performance and long life.

CONSTRUCTION & ELECTRICAL

- Two-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber.
 - Casting thermally conducts LED heat to optimize performance and long life.
 - Universal 120-277VAC or Universal High 347-480VAC
 - 1-10V Dimming
 - Both drivers have a power factor >90%, THD <20%.
 - Operating Temperature Range: -40°C to 40°C (-40°F - +104°F).
- Note: Operating with emergency battery temperature range: 10°C to 40°C (+50°F - +104°F).

PERFORMANCE DATA

CRI	70+
CCT	3000K, 4000K, 5000K
Projected Lifetime	>50,000+ Hours (L70)
Dimming	0-10Dimming Standard, 10% down to 100%
Operating Temperature	-40°C to 40°C Ambient
Warranty	5 year Standard 10 Year Extended

ORDERING INFORMATION

TITUS / _____ / _____ / _____ / _____ / _____ / _____ / _____ / _____ / _____ / _____
SERIES SIZE WATTAGE CRI/CCT VOLTAGE DRIVER FEATURES FINISH PHOTOCELL EMERG. BATT. WARRANTY

FIXTURE SERIES	
TITUS	Slim Full Cut Off LED Wall Pack
SIZE	
4	4 Inch Deep Wall Pack (26WS, 38WS, 65WS)
5	5 Inch Deep Wall Pack (100WS)
WATTAGE	
26WS	11W, 15W, 21W, 26W Select.
38WS	17W, 23W, 31W, 38W Select.
65WS	23W, 34W, 49W, 65W Select.
100WS	43W, 62W, 84W, 100W Select.
CRI/CCT	
CS	70+CRI, 30K, 40K, 50K CCT Select.

VOLTAGE	
UNV	Universal 120-277VAC
UHV	Universal High 347-480VAC (65WS & 100WS Only)
DRIVER FEATURES	
10V	0-10V Dimming
FINISH	
BZ	Bronze Powder Coat Finish (Standard)
WH	White Powder Coat Finish (MOQ & Ext. Lead Times)
BL	Black Powder Coat Finish (MOQ & Ext. Lead Times)
CU	Custom Powder Coat Finish (Contact Factory)


PHOTOCELL	
PC	120-277 VAC Button Photocell
EMERGENCY BATT. BACKUP	
EM8	8 Watt (900 lm) 90 Min. Emerg. Batt.
WARRANTY	
-	5 Year Warranty (Standard)
10Y	10 Year Warranty
10YL	10 Year Warranty with Labor




DIMENSIONS

unit: mm/inch

4 Inch Small Size (26WS, 36WS, 65WS)

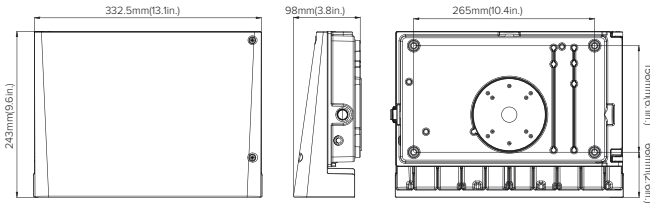

5 Inch Large Size (100WS)

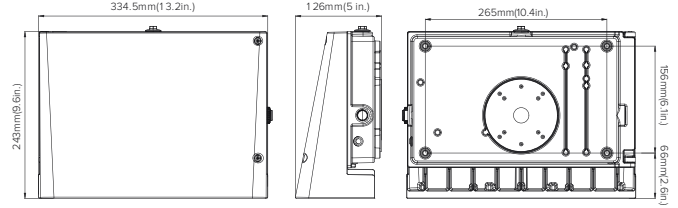

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	430	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09
1	680	38	120	0.32
		38	208	0.18
		38	240	0.16
		38	277	0.14
1	980	65	120	0.54
		65	208	0.31
		65	240	0.27
		65	277	0.23
	1850	65	347	0.19
		65	480	0.14
1	850	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
	2520	100	347	0.29
		100	480	0.21