



Client:	
Order #:	
Project:	

DESCRIPTION

Introducing the Adjustable Wall Pack RAWP – a versatile and energy-efficient lighting solution. Crafted with rugged aluminum construction, this fixture thrives in harsh environments. Its multi-mount capabilities enable tilt angle adjustments from 0° to 90°, making it adaptable to various settings. Specifically designed for replacements up to 400W MH, the RAWP is an ideal choice for building perimeters, entrances, stairways, and general security lighting. Illuminate your space with efficiency and flexibility.

FEATURES

- Field selectable 3000k (warm white), 4000k (neutral white), and 5000k (cool white) color temperatures
- Adjustable housing –up to 90°
- Easy installation in new construction or retrofit applications
- Lumen ranges from 3,050lm up to 10,560lm

CONSTRUCTION & ELECTRICAL

- Universal 120-277VAC and Standard 0-10V Dimming
- Adjustable housing –up to 90°
- Cast aluminum housing with dark bronze powder coat finish
- IP65 rated for ingress protection
- Polycarbonate lens
- Power Factor > 0.9
- THD < 20%
- Ambient operating temperature -40°C to 50°C (-40°F to 122°F)

PERFORMANCE DATA

CRI

80+

CCT

3000K, 4000K, 5000K

Projected Lifetime

>146,000 Hours (L70)
>44,000 Hours (L90)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to 50°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION


COREBAY / _____ / _____ / _____ / _____ / _____ / _____ / _____
SERIES SHAPE WATTAGE CCT VOLTAGE DRIVER FEATURES FINISH WARRANTY

FIXTURE SERIES	
RAWP	Adjustable LED Wall Pack
SHAPE	
7	7 Inch Nominal Width (35WS)
9	9 Inch Nominal Width (74WS)
WATTAGE	
35WS	20W, 25W, 35W Select. (3,050lm - 5,050lm)
74WS	45W, 60W, 74W Select. (6,550lm-10,560lm)

CRI/CCT	
CS	70+ CRI, 30K, 40K, 50K CCT Select.
VOLTAGE	
UNV	Universal 120-277VAC
DRIVER FEATURES	
10V	0-10V Dimming

FINISH	
BZ	Bronze Powder Coat Finish (Standard)
WARRANTY	
-	5 Year Warranty (Standard)
10Y	10 Year Warranty

DIMENSIONS

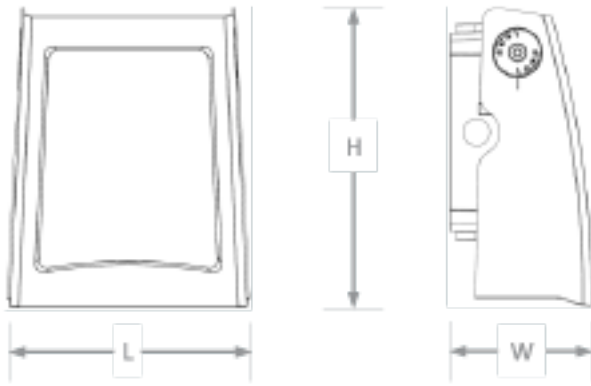

		<u>7in</u>	<u>9in</u>
Length	L	6.5"	8.5"
Width	W	4"	5"
Height	H	8"	11"
Weight (lbs.)		3	5